
## **ALUMINIUM SCAFFOLDING - DOUBLE WIDTH 16M TOWER HEIGHT**



## Features:

- The Double width Mobile tower is ACE,s scaffold system which has various applications for both interior and exterior use.
- The maximum working height for interior and exterior work is 17 meter
- Built in integral ladder frame, braces welded not crimped.
  Heavy duty claws on braces with fast release clip-trigger mechanism.
- Safe working load is 270Kg per platform and the total weight including the tower is 850Kg.
- The frames are connected with rigid spigot straight for easy assembling and dismantling along with locking pins to prevent accidental removal of frames.
- Caster wheels 200mm has a foot operated dual brake system and can easily be locked and released.300mm adjustable leg with self cleaning thread.
- The towers are equipped with standard & trapdoor platform along with aluminum or wooden toe board.
- Frame Width available 1.2, 1.4, 1.5, 1.7 & 2.0 meter
- Frame Length available 1.5, 2.0 & 2.5 meter.

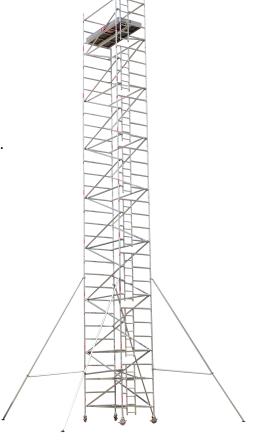

## **Description:**

SN.	Description of goods	Qty	Weight (Kg)	СВМ
	ALUMINUM LADDER FRAME MOBILE SCAFFOLDING DOUBLE WIDTH 16mtr TOWER HEIGHT AS PER BRITISH STANDARD	1 Set		
	W:1.40Mtr, L:2.50Mtr, Tower Ht:16.3Mtr, Platform Ht:15.3Mtr, Reach Ht:17.3Mtr			
1.	Aluminum Double Width 4 Rung Ladder Frames 140W x 200cmH	8	80	1.96
2.	Aluminum Double Width 4 Rung Span Frames 140W x 200cmH	8	67.2	1.54
3.	Anti Slip Working Platform Trapdoor size 250x50 cm	1	17.2	0.22
4.	Anti Slip Working Platform plain standard type 250x50 cm	1	17	0.22
5.	Diagonal Braces 270cm long	30	54	0.24
6.	Horizontal Braces 250cm long	18	27	0.108
7.	Heavy duty Castor wheels with dual brakes (8")	4	21.2	0.04
8.	Adjustable jack 50cm long	4	6	0.04
9.	Stabilizer 6mtr.	4	28	0.96
10.	Wooden toe board	1	1.9	0.002
11.	Snap pin	28	0.28	
	Total	107	319.38	5.748

