


## ALUMINIUM SCAFFOLDING - DOUBLE WIDTH 8M TOWER HEIGHT

### Features:

- The Double width Mobile tower is ACE,s scaffold system which has various applications for both interior and exterior use.
- The maximum working height for interior and exterior work is 17 meter
- Built in integral ladder frame, braces welded not crimped. Heavy duty claws on braces with fast release clip-trigger mechanism.
- Safe working load is 270Kg per platform and the total weight including the tower is 850Kg.
- The frames are connected with rigid spigot straight for easy assembling and dismantling along with locking pins to prevent accidental removal of frames .
- Caster wheels 200mm has a foot operated dual brake system and can easily be locked and released.300mm adjustable leg with self cleaning thread.
- The towers are equipped with standard & trapdoor platform along with aluminum or wooden toe board.
- Frame Width available 1.2, 1.4, 1.5, 1.7 & 2.0 meter
- Frame Length available 1.5 , 2.0 & 2.5 meter.

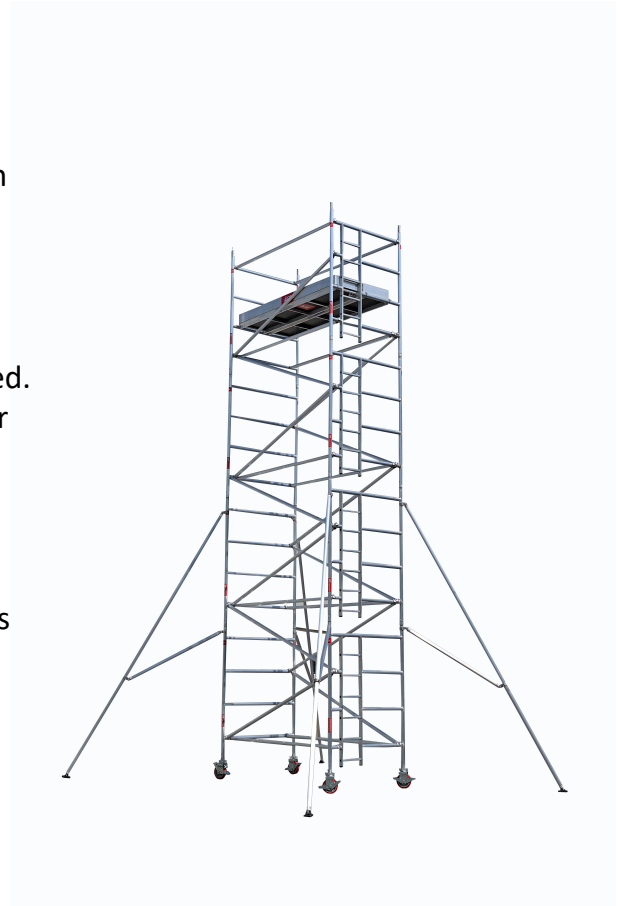

### Description:


SN.	Description of goods	Qty	Weight (Kg)	CBM
	<b>ALUMINUM LADDER FRAME MOBILE SCAFFOLDING DOUBLE WIDTH 8mtr TOWER HEIGHT AS PER BRITISH STANDARD</b> W:1.40Mtr, L:2.50Mtr, Tower Ht:8.3Mtr, Platform Ht:7.3Mtr, Reach Ht:9.3Mtr	<b>1 Set</b>		
1.	Aluminum Double Width 4 Rung Ladder Frames 140W x 200cmH	<b>4</b>	40	1.12
2.	Aluminum Double Width 4 Rung Span Frames 140W x 200cmH	<b>4</b>	33.6	0.88
3.	Anti Slip Working Platform Trapdoor size 250x55cm	<b>1</b>	17.2	0.22
4.	Anti Slip Working Platform plain standard type 250x55 cm	<b>1</b>	17	0.22
5.	Diagonal Braces 270cm long	<b>14</b>	25.2	0.112
6.	Horizontal Braces 250cm long	<b>10</b>	15	0.06
7.	Heavy duty Castor wheels with dual brakes ( 8")	<b>4</b>	21.2	0.01
8.	Adjustable jack 50cm long	<b>4</b>	6	0.01
9.	Stabilizer 450cm	<b>4</b>	28	0.96
10.	Wooden toe board	<b>1</b>	1.9	0.002
11.	Snap pin	<b>12</b>	0.12	
	<b>Total</b>	<b>59</b>	<b>205.22</b>	<b>3.666</b>

# ACE Aluminum Tower


Highly Versatile with variable heights and ready to erect

## Double width with built in ladder

SWL = 270kg per platform / 850 kg per tower

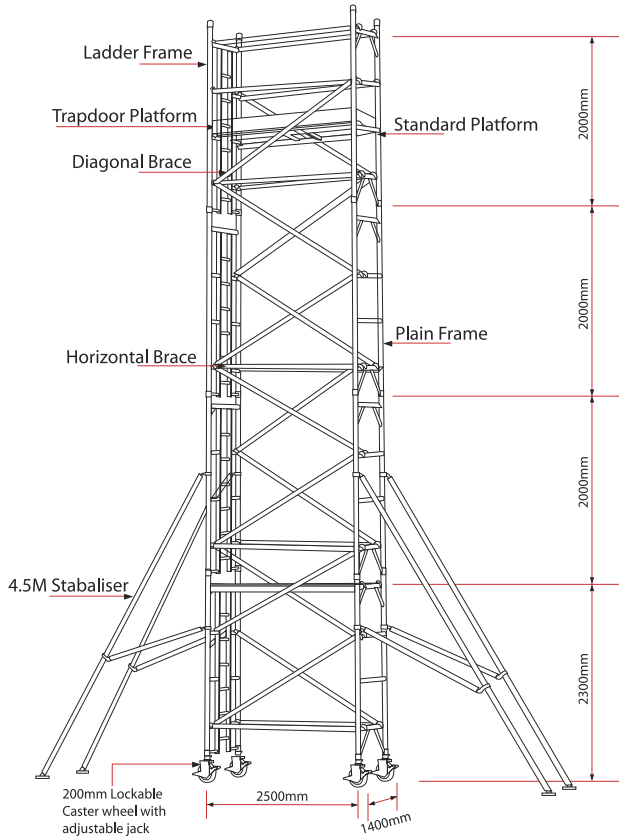

Tower Ref.	DW-250 x 140/8
Working Height	9.3 m
Tower Height	8.3 m
Platform Height	7.3 m
Width	1.40 m
Length	2.5 m



Ladder Frame



Span Frame



Platform Plain


Platform Door




Adjustable Base Jack




Wooden Toe Board




Snap Pin

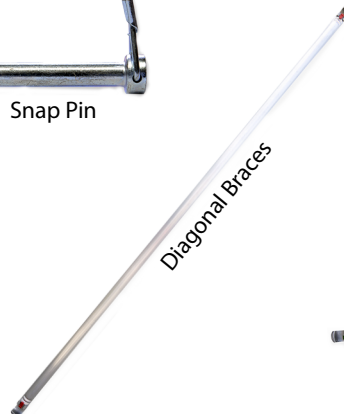

Diagonal Braces




Guard Rail



Horizontal Braces



Stabilizer



8" Caster Wheel with Dual Brake